

Specifications

Pan Europe / Pan Asia				
Pump	Dimension (L x W x H)	32.3 x 13 x 26.5 cm		
	Weight	3.6 kg		
	Supply voltage	220 - 240 V, 50 Hz		
	Therapy mode	Alternating (ALT) / Continuous Low Pressure (CLP, Static) / Alternating Low Pressure (ALP, Sleep Mode) / Max Firm		
	Cycle time	10 minutes		
	Noise Level	< 22 dBA**		
	Communication (LINK)	Cellular : 4G-LTE, UMTS		
Mattress	Dimension	Cells 20	Length 200 cm	Width 80 / 85 / 90 cm
	Type	Replacement		
	Weight	10 kg		
	Top cover material	4-way stretch PU, polyester cover with welded seams		
	Cell material	TPU		
	Maximum support weight	250 kg		

Middle East				
Pump	Dimension (L x W x H)	32.3 x 13 x 26.5 cm		
	Weight	3.6 kg		
	Supply voltage	220 - 240 V, 50/60 Hz		
	Therapy mode	Alternating (ALT) / Continuous Low Pressure (CLP, Static) / Alternating Low Pressure (ALP, Sleep Mode) / Max Firm		
	Cycle time	10 minutes		
	Noise Level	< 26 dBA**		
	Communication (LINK)	Cellular : 4G-LTE, UMTS		
Mattress	Dimension	Cells 20	Length 200 cm	Width 80 / 85 / 90 cm
	Type	Replacement		
	Weight	10 kg		
	Top cover material	4-way stretch PU, polyester cover with welded seams		
	Cell material	TPU		
	Maximum support weight	250 kg		

North America				
Pump	Dimension (L x W x H)	12.7 x 5.2 x 10.4 in		
	Weight	7.9 lbs		
	Supply voltage	110-120V, 60Hz		
	Therapy mode	Alternating (ALT) / Continuous Low Pressure (CLP, Static) / Alternating Low Pressure (ALP, Sleep Mode) / Max Firm		
	Cycle time	10 minutes		
	Noise Level	< 24 dBA **		
	Communication (LINK)	Cellular : 4G-LTE, UMTS		
Mattress	Dimension	Cells 20	Length 80 in	Width 36 in
	Type	Replacement		
	Weight	22 lbs		
	Top cover material	4-way stretch PU, polyester cover with welded seams		
	Cell material	TPU		
	Maximum support weight	550 lbs		

Pump: water resistant standards (IP42); Mattress: flame retardant standards (EN597-1, EN597-2), RoHS, WEEE
**Internal test conducted in a controlled environment

Procare Auto G3

Procare Auto Link G3

Maximize the efficiency of clinical workflow
with digitalized automation



Procare Auto G3 Procare Auto Link G3

Maximize the efficiency of clinical workflow
with digitalized automation

Procare Auto G3 and Procare Auto Link G3 are advanced support surfaces designed to revolutionize patient care by leveraging the efficiency of clinical workflow.

The system combines intelligent pressure redistribution with automatic adjustments and cushion setting to deliver consistent, seamless support for patients at high to very high risk of pressure injuries.


Addressing inefficiencies in the support surface supply process

- L** The duration of mattress preparation affects the waiting time, which increases the risk of pressure injuries.
- +** The effectiveness of CPR is correlated with the time of emergency response.
- \$** Low utilization rate and maintenance efficiency in rental business.


Values and Solutions

Designed for professional healthcare facilities, addressing the needs of speed, reliability, and ease of use for caregivers.

Procare Auto G3 & Procare Auto Link G3 streamline the clinical workflow through digitalized automation, maximizing the operational efficiency to empower **Smarter, Safer, Faster** patient recovery care.

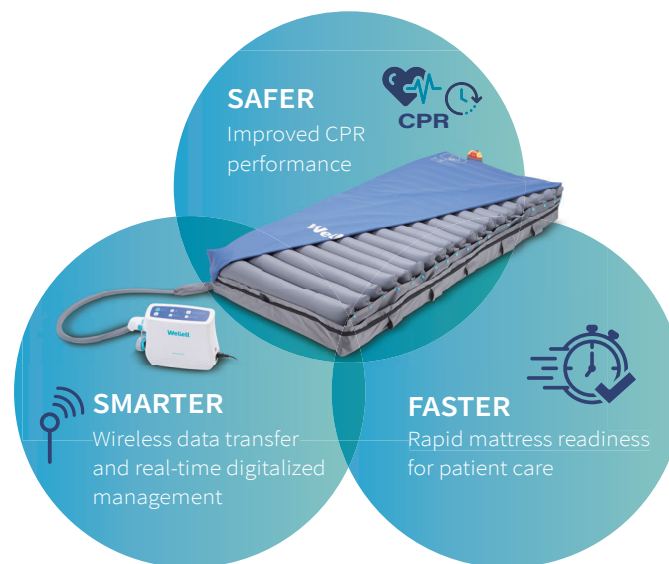

Link Connectivity

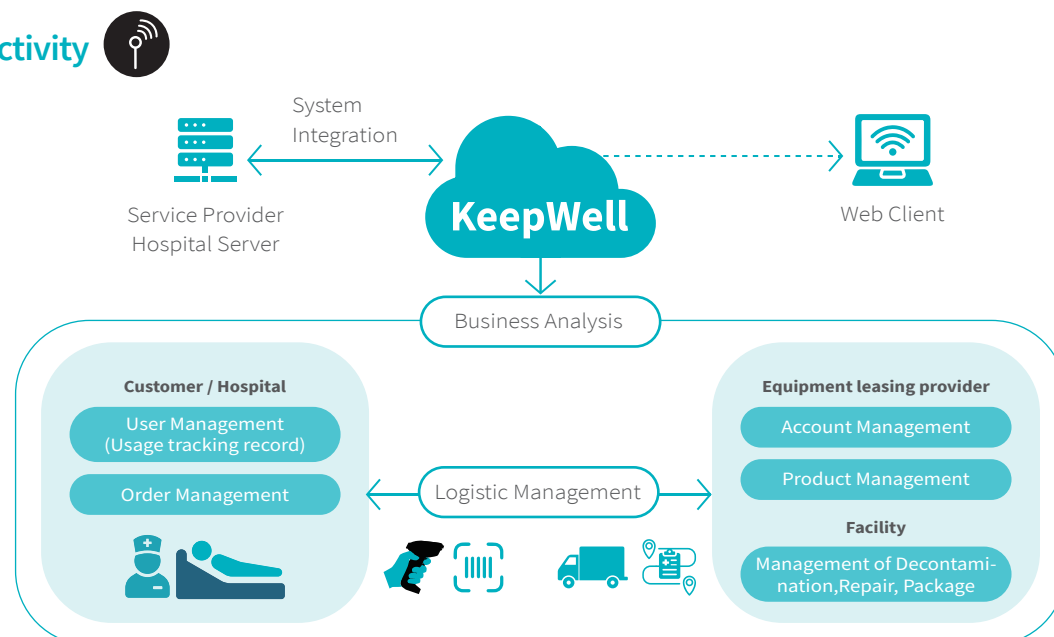

Procare Auto G3 & Procare Auto Link G3 Revolutionizing Patient Recovery Care with Smart Intuitive Design



PUMP Features

- Mattress & Cushion Integration**
The pump can be shared between the mattress and cushion, with automatic recognition for seamless system operation
- Clear Icons for Intuitive Operation**
 - Max firm
 - Treatment modes : ALT / CLP (Static) / ALP (Sleep mode)
 - Adjustable comfort level / Audiovisual alarms
- Auto Adjustment (AA)**
Automatically optimizes the pressure redistribution based on patient's weight
- Wireless Data Transfer Function**
Using 4G LTE communication for real-time tracking and data transmission
- Twin-head Compressor**
Providing high flowrate to inflate the mattress within 11 minutes and operates at low noise.

MATTRESS Features

- Press-Aid CPR Valve Enables Faster CPR Preparation**
An easy to access, press-to-release, single handed operation design performs quick deflation within 10 seconds
- Easy Maintenance & Faster Assemble**
 - FlexVent (non-PVC air tunnels)
 - Color coded A/B snap-on tubes
 - Asset tracking tags
- Durable Quick Connector**
 - A more durable fuel nozzle-style quick connector
 - Easy-to-clean rectangular air hose design

Pressure Map

Subject: 181 cm/85 kg

